

AMILO L7310 Wireless LAN configuration

Issue 09/25/2006

Category Installation paper

Content Wireless LAN configuration

Use External

Pages 2

1. Activate wireless LAN adapter

- Press Fn+F1 to activate wireless LAN
- The wireless LAN LED is available after FSC boot logo




2. Software

- Odyssey Client 4.02.0.1942

3. Configuration with Odyssey client without encryption

- Activate wireless LAN adapter with wireless LAN button (wireless LAN indicator is on)
- Deactivate Windows wireless LAN client (WZC):
Start → Control Panel → Network and Internet Connections → Network Connection
→ Wireless Network Connection → Properties → Wireless Networks → Unmark
„use Windows to configure my wireless network settings“ → OK
- Start → All Programs → Fujitsu Siemens Computers → Odyssey Client for Fujitsu Siemens Computers
- Select “Networks” → Add → enter SSID
→ Association mode = open
→ Encryption method = none → OK

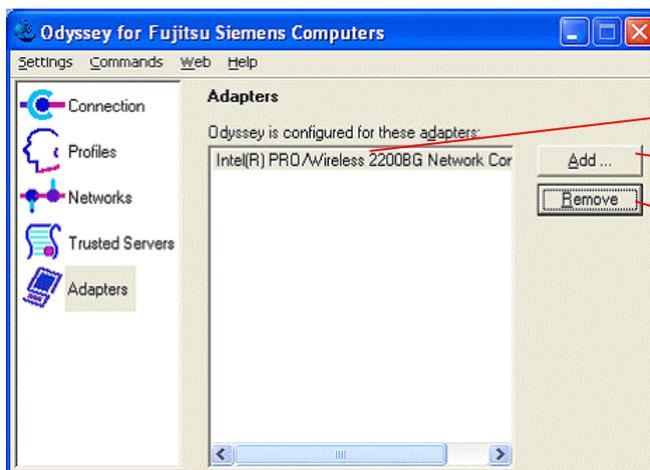


Adapter name has to be the same as in Device Manager


Adds a wireless LAN adapter

Removes an existing wireless LAN adapter


!!Important!! If the driver of the wireless LAN adapter will be changed in the Device Manager, then you have to remove the adapter in Odyssey Client and add it anew

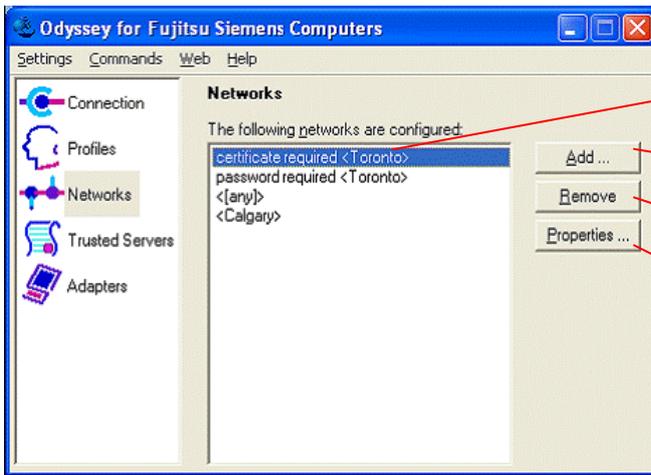

- Displays the configured networks
- Adds a new network
- Removes an existing network
- Shows the connection properties

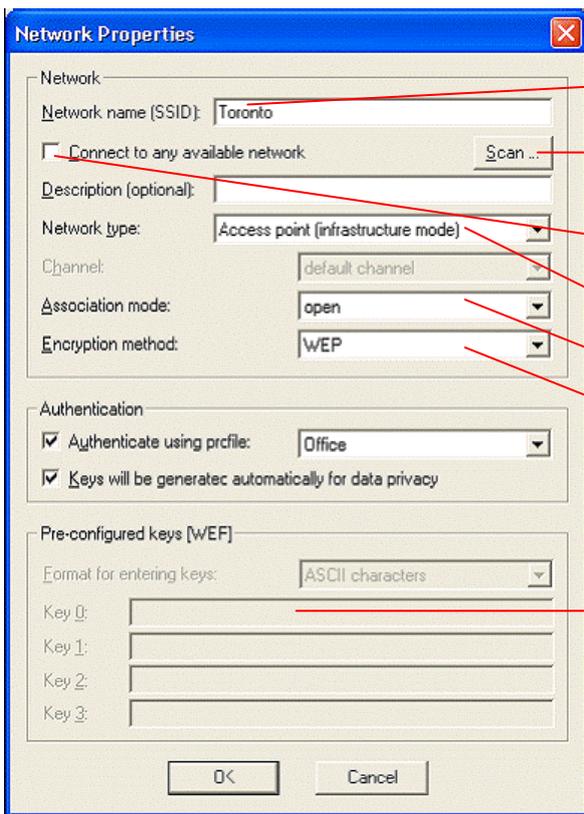

- Name of the network (SSID=Service Set Identifier)
- Scans and displays all available connections
- Connects automatically to an available wireless LAN
- Access Point or ad-hoc (peer-to-peer)
- Open, shared, WPA and WPA2
- None, WEP, WPA, WPA2
- Input field for the encryption key
"For WPA and WPA2 the field is called Passphrase"

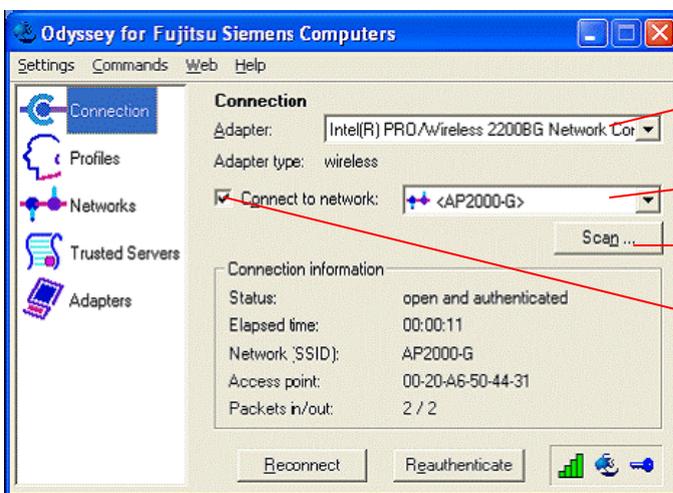

- Compare with name in Device Manager
- Select the correct SSID
- Scans for and shows all available connections
- Mark Connect to network